

Manual Supplement

Manual Title: VT02 Users
Print Date: October 2012
Revision/Date:

Supplement Issue: **2**
Issue Date: 11/12
Page Count: 3

This supplement contains information necessary to ensure the accuracy of the above manual. This manual is distributed as an electronic manual on the following CD-ROM:

CD Title: VT02
CD Rev. & Date: 10/2012
CD PN: 4253607

Change #1, 63549, 63572, 63610, 63615

On page 1, replace the 4th paragraph with:

The VT02 is easy to use. Turn on and within seconds it provides an image. The Product is ideal for electricians and maintenance technicians and can be used to find areas of concern quickly.

On page 4, replace the Note 1 with:


- [1] Fluke recommends the micro SD memory card that is supplied with the Product. Fluke does not warrant the use or reliability of aftermarket SD memory cards of different brands or capacities.

On page 6, replace Item 3 with:

③	Micro SD Memory Card Slot
---	---------------------------


On page 7, delete the **Focus** section.

On page 11, following **Temperature Measurement**, add the following figures:

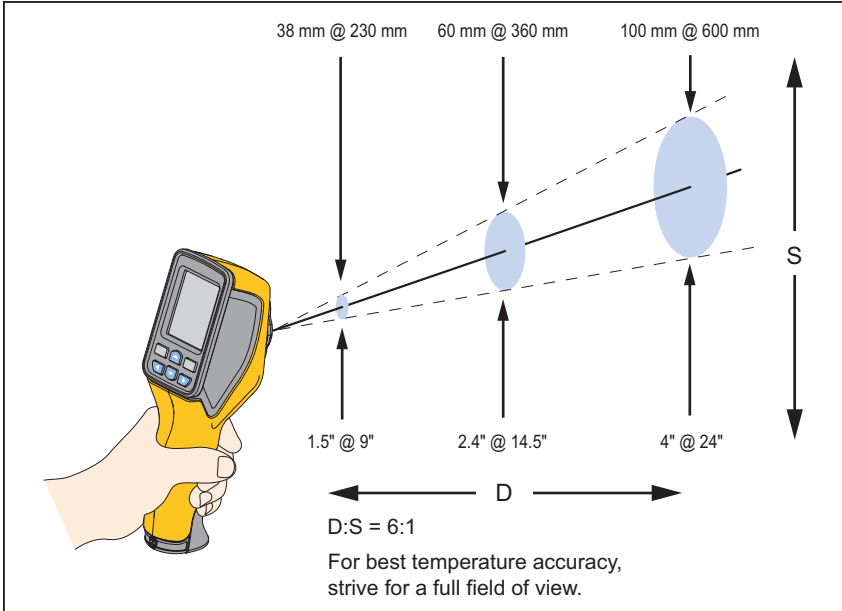

hak09.eps

Temperature Measurement Accuracy

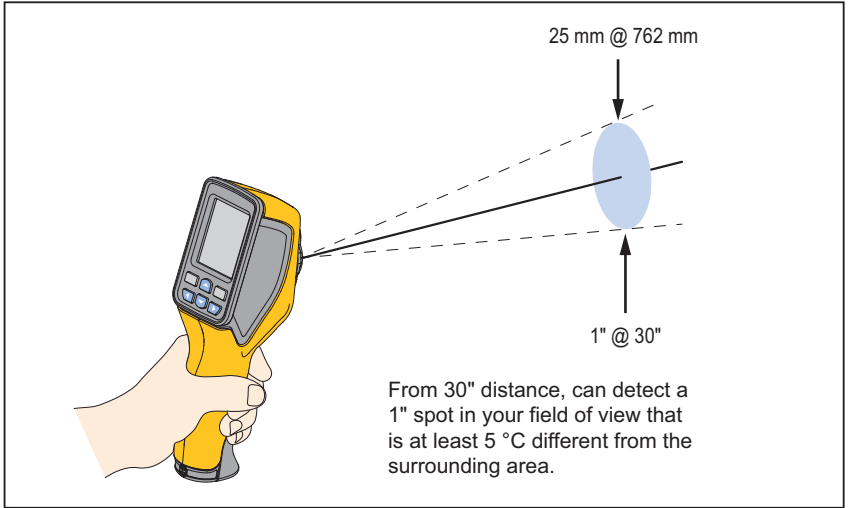

hak14.eps

Detection Ability

On page 18, under **Temperature**,

Change: Temperature Measurement Accuracy $\pm 2\text{ }^\circ\text{C}$ or $\pm 2\%$ of reading in $^\circ\text{C}$, whichever is the greater (at 23° nominal)

To: Temperature Measurement Accuracy..... $\pm 2\text{ }^\circ\text{C}$ or $\pm 2\%$ as tested (at $25\text{ }^\circ\text{C}$), whichever is greater

Under **Image Performance**, delete:

Minimum Focus Distance 50 cm

Under **Blending Information**,

Change: Parallax Correction of Visual and IR Blending...Fixed

To: Parallax Correction of Visual and IR Blending...Fixed (best alignment at 75 cm)

Change #2, 63704

On page 18, under **Image Performance**, replace Infrared Spectral Band with:

Infrared Spectral Band..... $6.5\text{ }\mu\text{m}$ to $14\text{ }\mu\text{m}$