


# Touch-protected Passive Oscilloscope Probes Isoprobe II and Probe Sets

## Isoprobe II – 1:1

Safety high-frequency test probe with highly flexible PVC-insulated coaxial connecting lead with BNC plug. Ø 2 mm safety socket for reference lead connection in the handling part.

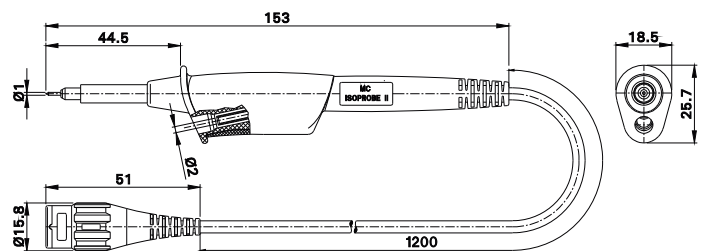

Order No.	Type		Lead length [cm]	Colour
68.9870-12021	Isoprobe II – 1:1	PVC CE cUL LISTED	120	21

Technical Data		
Rated voltage (frequency-dependent)	Max. 300 V, CAT III	
Dividing ratio	1:1	
Input capacitance	Input capacitance of measuring instrument + 42 pF	
Input resistance	Input resistance of measuring instrument	
Frequency range	0 ... 45 MHz	
Rise time	Rise time of measuring instrument + 6 ns	
Lead length	120 cm	





### User information i041

[www.staubli.com/electrical](http://www.staubli.com/electrical)




## SET Isoprobe II – 1:1


Test probe set, consisting of safety high-frequency test probe Isoprobe II - 1:1 and accessories.



Order No.	Type	Rated voltage		Colour
68.9490-21	SET Isoprobe II - 1:1	Max. 300 V, CAT III	 	21

### Supplied components

Isoprobe II – 1:1 Page 12	
HC200 Page 37	
GM200 Page 40	

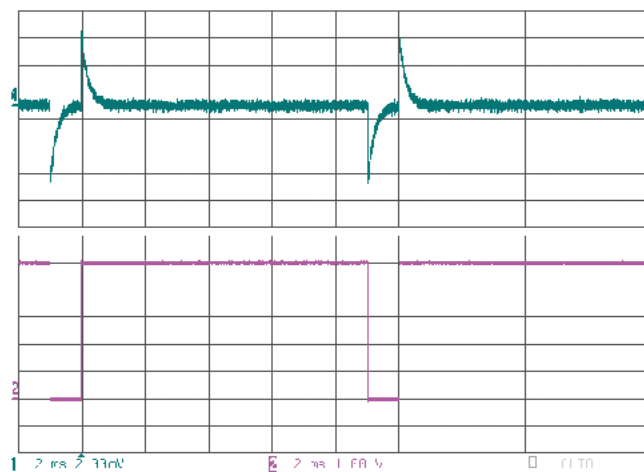

### User information **i041**

[www.staubli.com/electrical](http://www.staubli.com/electrical)