


Isoprobe II – 10:1 – 2,5

Safety high-frequency 10:1 test probe with a long, highly flexible PVC-insulated coaxial connecting lead with BNC plug, specially suited for bridging long distances between the test instrument and the object under

test. Compensation adjustment screw and Ø 2 mm safety socket for reference lead connection in the handling part.

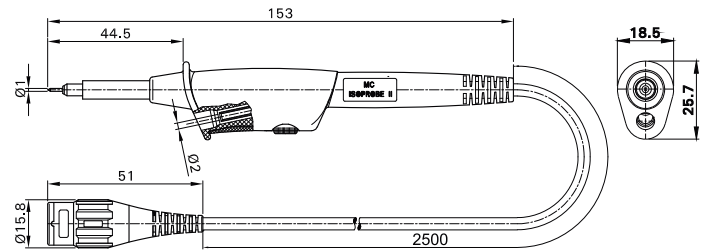

Order No.	Type		Lead length [cm]	Colour
68.9495-25022	Isoprobe II – 10:1 – 2,5	PVC CE cUL LISTED	250	22

Technical Data		
Rated voltage (frequency-dependent)	Max. 1000 V, CAT II (600 V, CAT III)	
Dividing ratio	10:1	
Input capacitance	18 pF	
Compensation range (works setting)	10 pF ... 30 pF (15 pF)	
Input resistance	10 MΩ	
Frequency range	0 ... 150 MHz	
Rise time	1.3 ns	
Lead length	250 cm	



User information i052



www.staubli.com/electrical

SET Isoprobe II – 10:1 – 2,5

Test probe set, consisting of safety high-frequency test probe Isoprobe II - 10:1 - 2,5 and accessories. The test probe with long

connecting lead is specially suited for bridging long distances between the test instrument and the object under test.



Order No.	Type	Rated voltage		Colour
68.9496-22	SET Isoprobe II – 10:1 – 2,5	Max. 1000 V, CAT II (600 V, CAT III)	 	22

Supplied components

Isoprobe II – 10:1 – 2,5 Page 20	
HC200 Page 37	
GM200 Page 40	



User information **i052**

www.staubli.com/electrical