


## Isoprobe III – 10:1 HS

Safety high-frequency 10:1 test probe. Highly flexible PVC-insulated coaxial connecting lead with BNC plug with integrated

compensation unit. Ø 2 mm safety socket for reference lead connection in the handling part of the probe.

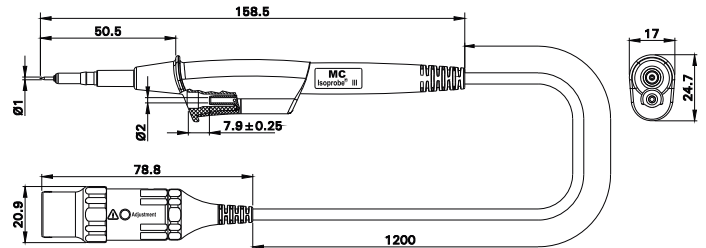

Order No.	Type		Lead length [cm]	Colour
68.9533-12028	Isoprobe III – 10:1 HS	PVC CE cUL LISTED	120	28

Technical Data		
Rated voltage (frequency-dependent)	Max. 1000 V, CAT III (600 V, CAT IV)	
Dividing ratio	10:1	
Input capacitance	13.5 pF	
Compensation range (works setting)	10 pF ... 30 pF (25 pF)	
Input resistance	10 MΩ	
Frequency range	0 ... 300 MHz	
Rise time	1.1 ns	
Lead length	120 cm	



### User information i085

[www.staubli.com/electrical](http://www.staubli.com/electrical)


## SET Isoprobe III – 10:1 HS

The particularly comprehensive accessories of the set Isoprobe III - 10:1 HS include, among others, two jaw clips for applications









such as test connections to busbars. This set addresses itself to heavy-current engi-


neers who make measurements directly on the mains.



Order No.	Type	Rated voltage		Colour
68.9557-28	SET Isoprobe III – 10:1 HS	Max. 1000 V, CAT III (600 V, CAT IV)	CE 	28

### Supplied components

Isoprobe III – 10:1 HS Page 29			
ZGA-S Page 37		SK-IP Page 39	
AC200 Page 37		SCC Page 40	
GM284 Page 40			
AB200 Page 39			
GB284 Page 40			

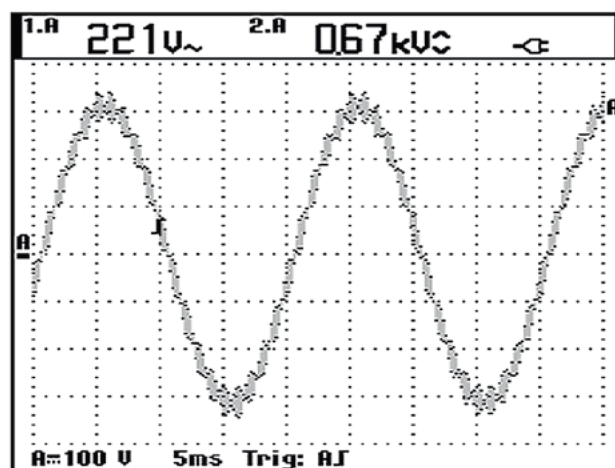

User information **i085**

[www.staubli.com/electrical](http://www.staubli.com/electrical)