


GM200-F GM200 GM284

Highly flexible reference leads with insulation in PVC or silicone. One end with right

angled Ø 2 mm plug with rigid insulating sleeve, other end with crocodile clip with all-

round insulation and toothed gripping jaws with fine-wire clamping surface.

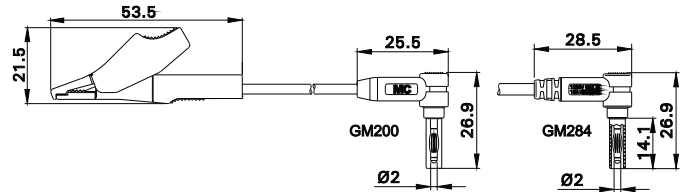


Order No.	Type	Rated voltage/current	Lead cross section		Lead length [cm]	Colour
68.9488-02521	GM200-F	1000 V, CAT II (600 V, CAT III) / 10 A	0.50 mm ²	SIL CE cUL LISTED US	025	21
68.9487-02521	GM200	1000 V, CAT II (600 V, CAT III) / 10 A	0.50 mm ²	SIL CE cUL LISTED US	025	21
68.9517-02521	GM284	1000 V, CAT III (600 V, CAT IV) / 10 A	0.50 mm ²	SIL CE cUL LISTED US	025	21

GB200 GB284

Highly flexible Silicone-insulated reference leads. One end with Ø 2 mm safety plug,



other end with Ø 4 mm safety plug. Lead length: 50 cm.

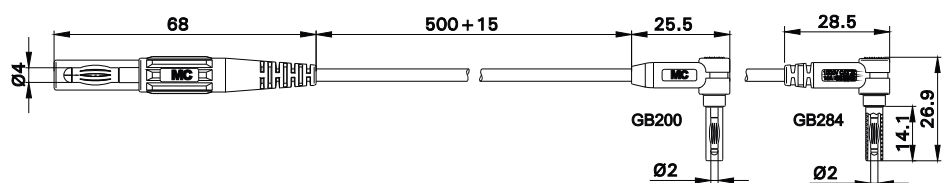

Order No.	Type	Rated voltage/current	Lead cross section		Lead length [cm]	Colour
68.9489-05021	GB200	1000 V, CAT II (600 V, CAT III) / 10 A	0.75 mm ²	SIL CE cUL LISTED US	050	21
68.9518-05021	GB284	1000 V, CAT III (600 V, CAT IV) / 10 A	0.75 mm ²	SIL CE cUL LISTED US	050	21

SCC

Set of colour clips for Isoprobe connecting lead (5 x 2 pcs.).



Order No.	Type
68.9513	SCC