


Test probe with measurement cable XPF-480/2G

Highly flexible test leads. One end with $\varnothing 2$ mm test probe made of stainless steel with a thread for use with screw-on acces-

series, offering various contacting possibilities. The other end with in-line or right angled

$\varnothing 4$ mm MULTILAM plug with rigid insulating sleeve. Supplied with protective cap.

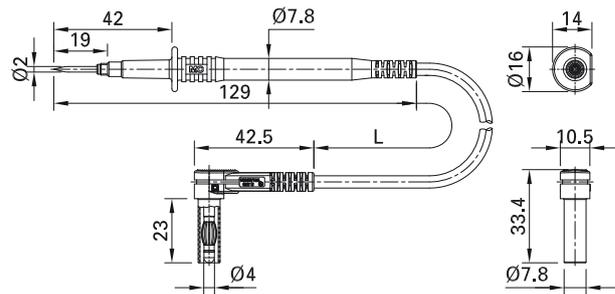

Order No.	Type	Rated voltage/current	Lead		Lead lengths L [cm]	*Standard colors
66.9645-□*	XPF-480/2G	1000 V, CAT II / 15 A	PVC 0,75 mm ²	Ni CE c UL us	100 150	21 22



Optional colors [23](#)

Optional lengths on demand

Further information, page 6



Screw-on accessories

HC200-2G, XKK-200-2G, see below