


Test lead FAL

Highly flexible, with in-line Ø 4 mm MULTILAM plugs on both ends.



Order No.	Type	Rated voltage/current	Lead		Lead lengths L [cm]	*Standard colors
64.9289-□*	FAL	30 VAC / 15 A 60 VDC / 15 A	PVC 0.75 mm ²	Ni	100 200	21 22 23 24 25


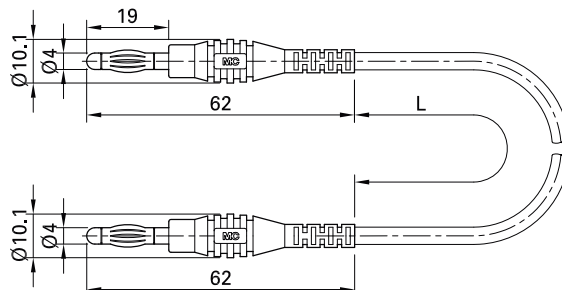


Optional lengths on demand

Further information, page 6

Test lead LK410L-41/A

Highly flexible, with in-line Ø 4 mm MULTILAM plugs on both ends.

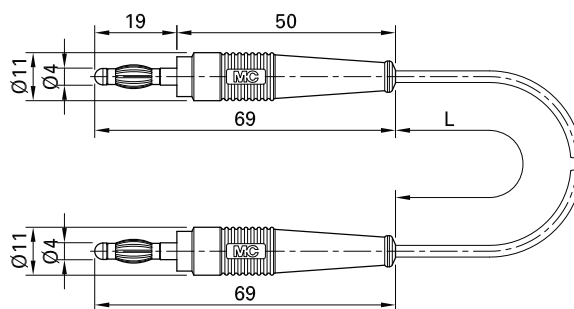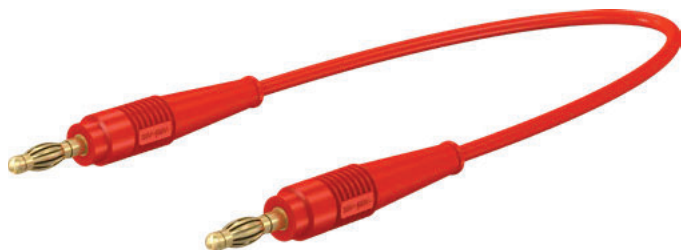

Order No.	Type	Rated voltage/current	Lead		Lead lengths L [cm]	*Standard colors
64.1025-□*	LK410L-41/A	30 VAC / 19 A 60 VDC / 19 A	PVC 1.0 mm ²	Au	025 050 075 100 150 200	20 21 22 23 24 25 26 27 28 29



User information **i096**

www.staubli.com/electrical



Optional lengths on demand

Further information, page 6