


Plug ZGL-4...

Stackable, Ø 4 mm, with spring-loaded MULTILAM for self-assembly of test leads.
With retractable sleeve to prevent accidental touching.

Screw connection.

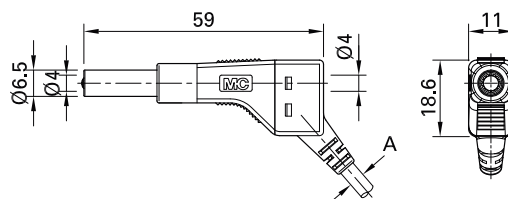

Order No.	Type	Rated voltage/current	Cable (A)	Assembly instructions		*Standard colors												
64.9325-*	ZGL-410	30 VAC / 19 A 60 VDC / 19 A	min. Ø 3.4 mm max. Ø 3.9 mm	1.0 mm ²	MAH 555	<table border="1"> <tr> <td>Ni</td> <td>20</td> <td>21</td> <td>22</td> <td>23</td> <td>24</td> </tr> <tr> <td></td> <td>25</td> <td>26</td> <td>27</td> <td>28</td> <td>29</td> </tr> </table>	Ni	20	21	22	23	24		25	26	27	28	29
Ni	20	21	22	23	24													
	25	26	27	28	29													
64.9326-*	ZGL-425	30 VAC / 32 A 60 VDC / 32 A	min. Ø 3.4 mm max. Ø 3.9 mm	2.5 mm ²	MAH 556	<table border="1"> <tr> <td>Ni</td> <td>20</td> <td>21</td> <td>22</td> <td>23</td> <td>24</td> </tr> <tr> <td></td> <td>25</td> <td>26</td> <td>27</td> <td>28</td> <td>29</td> </tr> </table>	Ni	20	21	22	23	24		25	26	27	28	29
Ni	20	21	22	23	24													
	25	26	27	28	29													



Assembly instructions

MAH555, MAH556

www.staubli.com/electrical