


Plug GL-438

In-line, Ø 4 mm, with spring-loaded MULTILAM for self-assembly of test leads.

With retractable sleeve to prevent accidental touching.

Screw connection.

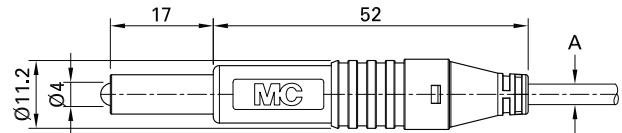

Order No.	Type	Rated voltage/current	Cable (A)		*Standard colors
64.9701-*	GL-438	30 VAC / 32 A 60 VDC / 32 A	max. Ø 3.9 mm 2.5 mm ²	Ni	21 22



Assembly instructions MAH522

www.staubli.com/electrical





Optional colors 23 24 25 26

Further information, page 6

Plug KLS4

Ø 4 mm, with spring-loaded MULTILAM for clamp-connecting stranded wires.

Clamp connection.

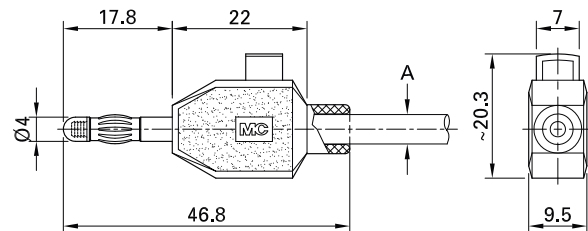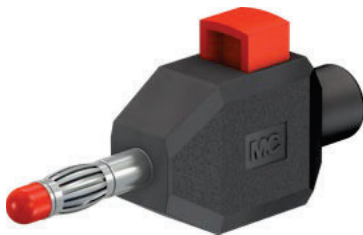

Order No.	Type	Rated voltage/current	Cable (A)		*Standard colors
22.3006-*	KLS4	30 VAC / 10 A 60 VDC / 10 A	max. Ø 4.8 mm max. 2.5 mm ²	Ni	21 22



User information i023

www.staubli.com/electrical