

Plugs SLQ-4... SLM-4...

Stackable, Ø 4 mm, with spring-loaded MULTILAM, for self-assembly of test leads. With rigid insulating sleeve.


Various types of connection:

SLM-4...: Screw connection

SLQ-4...: Cross hole for solder connection

SLQ-4...

SLM-4...

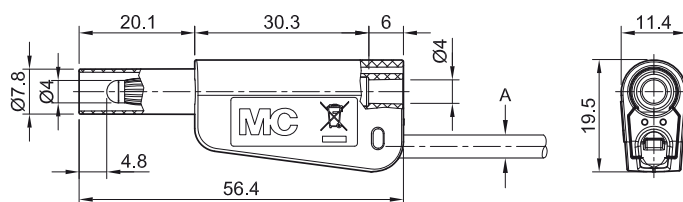

Order No.	Type	Rated voltage/current	Lead (A)		*Standard colors
66.2018-*	SLQ-4N-39	1000 V, CAT II/19 A 600 V, CAT III/19 A	PVC Ø 3.9 mm SIL Ø 3.9 mm 1.0 mm ²	Ni	20 21 22 23 24 25 26 27 28 29 30
66.2019-*	SLQ-4A-39			Au	
66.2020-*	SLM-4N-39			Ni	
66.2021-*	SLM-4A-39			Au	
66.2022-*	SLQ-4N-46	1000 V, CAT II/32 A 600 V, CAT III/32 A	PVC Ø 3.9 mm SIL Ø 4.6 mm 2.5 mm ²	Ni	20 21 22 23 24 25 26 27 28 29 30
66.2023-*	SLQ-4A-46			Au	
66.2024-*	SLM-4N-46			Ni	
66.2025-*	SLM-4A-46			Au	

Component parts

66.2026-*	KT-SL-4-39	Connection sleeve suitable for	SLQ-4N-39; SLQ-4A-39; SLM-4N-39; SLM-4A-39
66.2027-*	KT-SL-4-46	Connection sleeve suitable for	SLQ-4N-46; SLQ-4A-46; SLM-4N-46; SLM-4A-46
66.2028	LS-SLQ-4N	Plug suitable for	SLQ-4N-39; SLQ-4N-46
66.2029	LS-SLQ-4A	Plug suitable for	SLQ-4A-39; SLQ-4A-46
66.2030	LS-SLM-4N	Plug suitable for	SLM-4N-39; SLM-4N-46
66.2031	LS-SLM-4A	Plug suitable for	SLM-4A-39; SLM-4A-46



Assembly instructions MA167

www.staubli.com/electrical