


Test leads

Test leads LK-4...

Highly flexible, with stackable Ø 4 mm MULTILAM plugs.

LK-4A...

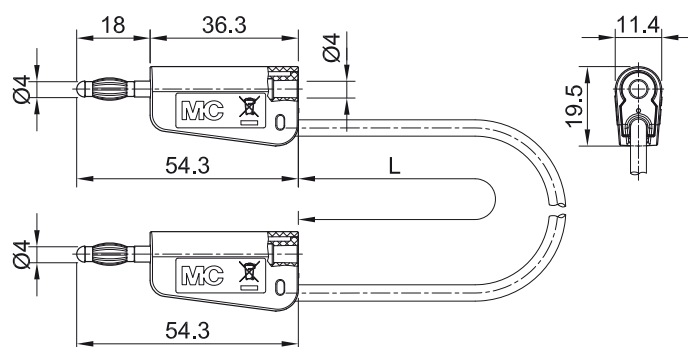

Order No.	Type	Rated voltage/current	Lead		Lead lengths L [cm]	*Standard colors
64.1032-□*	LK-4N-S10	AC 30 V/19 A DC 60 V/19 A	SIL 1.0 mm ²	Ni	025 050 075	20 21 22 23 24
64.1033-□*	LK-4A-S10			Au	100 150 200	25 26 27 28 29
64.1036-□*	LK-4N-S25	AC 30 V/32 A DC 60 V/32 A	SIL 2.5 mm ²	Ni	025 050 075	20 21 22 23 24
64.1037-□*	LK-4A-S25			Au	100 150 200	25 26 27 28 29
64.1030-□*	LK-4N-F10	AC 30 V/19 A DC 60 V/19 A	PVC 1.0 mm ²	Ni	025 050 075	20 21 22 23 24
64.1031-□*	LK-4A-F10			Au	100 150 200	25 26 27 28 29
64.1034-□*	LK-4N-F25	AC 30 V/32 A DC 60 V/32 A	PVC 2.5 mm ²	Ni	025 050 075	20 21 22 23 24
64.1035-□*	LK-4A-F25			Au	100 150 200	25 26 27 28 29



User information **i096**, **i099**

www.staubli.com/electrical