

Press-in socket EB4-IR/...


Insulated \varnothing 4 mm rigid. Machined brass.
The socket is pressed into predrilled panels of plastic, metal etc.

Connection: Round connecting pin
 \varnothing 1.9 mm.

EB4-IR/A



EB4-IR/N

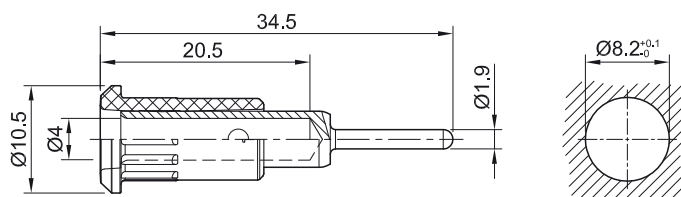

Order No.	Type	Rated voltage/current		*Standard colors										
64.3012-*	EB4-IR/A	AC 30 V/25 A DC 60 V/25 A	Au	<table border="1"> <tr> <td>20</td> <td>21</td> <td>22</td> <td>23</td> <td>24</td> </tr> <tr> <td>25</td> <td>26</td> <td>27</td> <td>28</td> <td>29</td> </tr> </table>	20	21	22	23	24	25	26	27	28	29
20	21	22	23	24										
25	26	27	28	29										
64.3011-*	EB4-IR/N	AC 30 V/25 A DC 60 V/25 A	Ni	<table border="1"> <tr> <td>20</td> <td>21</td> <td>22</td> <td>23</td> <td>24</td> </tr> <tr> <td>25</td> <td>26</td> <td>27</td> <td>28</td> <td>29</td> </tr> </table>	20	21	22	23	24	25	26	27	28	29
20	21	22	23	24										
25	26	27	28	29										

Component parts

64.3030-*	I-EB4-I	Insulator
64.3021	B-EB4-IR_AU	Socket for EB4-IR/A
64.3022	B-EB4-IR_NI	Socket for EB4-IR/N



Press-in tool MB4, page 122



Assembly instructions MA169

www.staubli.com/electrical